
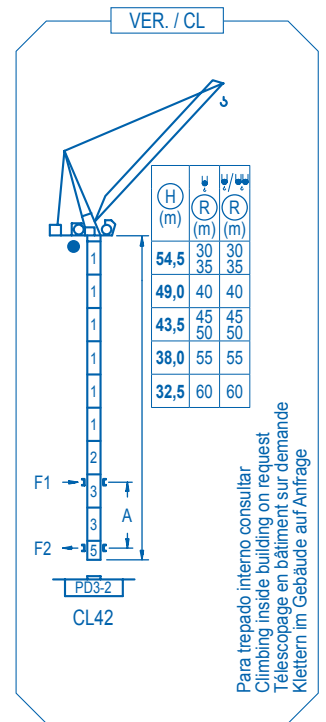
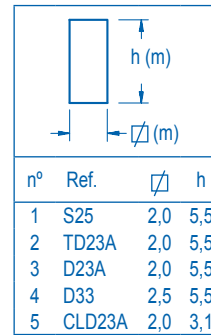
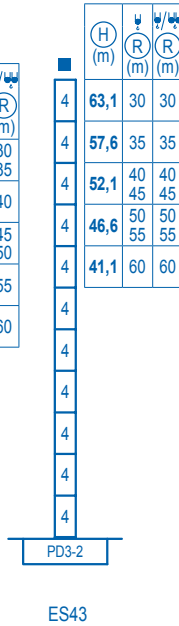
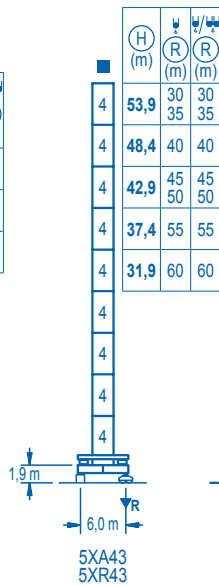
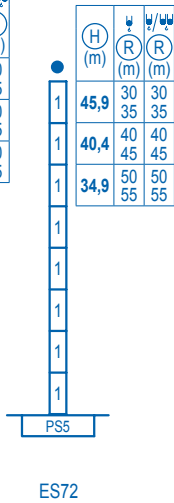



R (m)	ψ	R _{Cmax} (m)	10	15	20	25	30	35	40	45	50	55	60	↔(m) ↓(kg)
60		28,5				6000	5460	4140	3280	2670	2210	1850	1550	
55		32,5					6000	5250	4140	3360	2780	2300		
50		35,5						6000	4820	3880	3150			
45		36,5						6000	5080	4050				
40		37,6						6000	5300					
35		35,0						6000						
30		30,0					6000							
R (m)	ψ/ψ	R _{Cmax} (m)	10	15	20	25	30	35	40	45	50	55	60	↔(m) ↓(kg)
60		13,5	12000	10140	6590	4800	3710	2980	2460	2070	1760	1510	1300	
55		20,2			12000	7950	5780	4460	3580	2940	2450	2050		
50		21,0			12000	8870	6600	5170	4200	3470	2900			
45		21,4			12000	9370	7090	5620	4590	3800				
40		22,3			12000	10120	7750	6190	5050					
35		23,4			12000	10850	8260	6500						
30		23,5			12000	10950	8300							

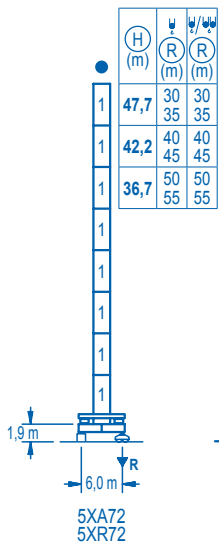

R. máx.	En servicio In operation En service In Betrieb	5XR72.....111 t 5XR43.....119 t
----------------	---	------------------------------------

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	5XR72.....144 t 5XR43.....167 t
----------------	---	------------------------------------

Para otras zonas de viento o alturas superiores consultar
For other wind zones or additional hook heights on request
Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande
Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage



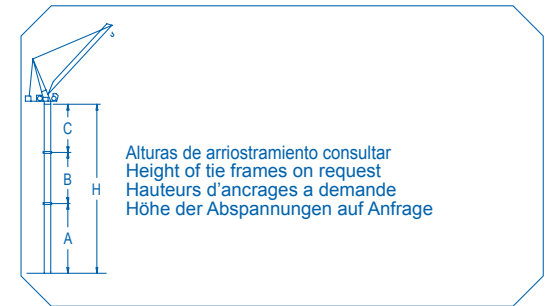


	AFU2-45-40 45 kW
1,8 min	

	GR-12 2 x 120 Nm
0 ⇄ 0,7 rpm	

	TRA-7.5 2 x 75 Nm
0 ⇄ 20 m/min	

	TRA-7.5VC 2 x 75 Nm
0 ⇄ 20 m/min	

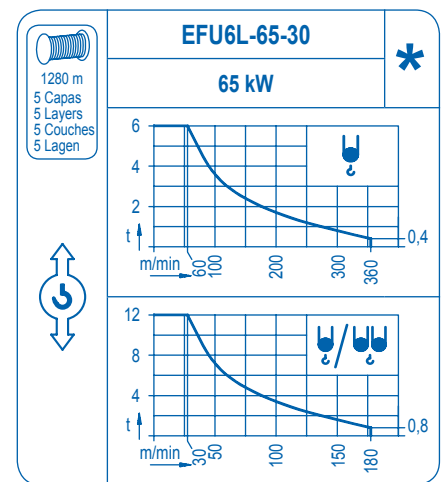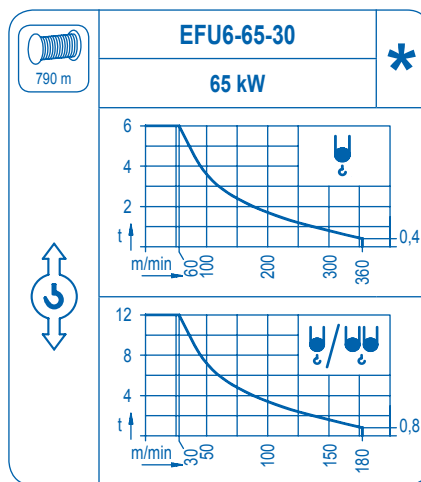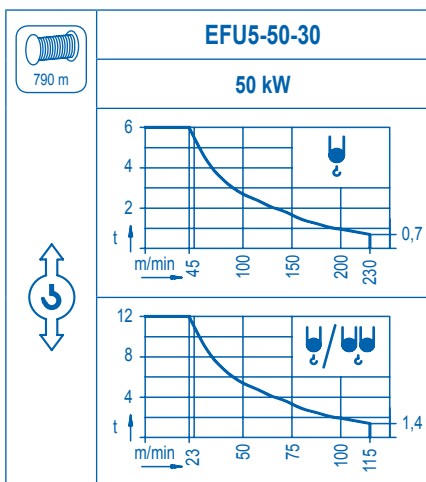

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN